
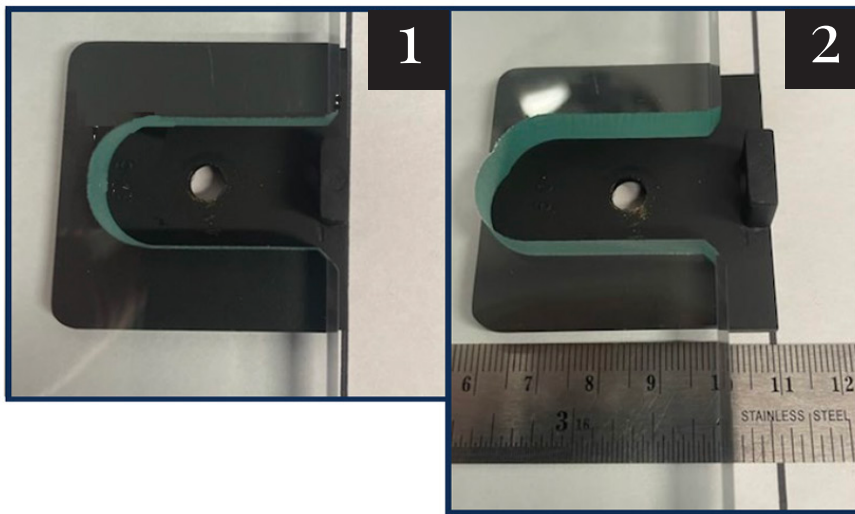


Using standard beveled (CGTW) or square (CGTWS) clamp:

- Minimum clearance from edge of glass to wall or curb substrate is 1/16". (Pic. 1)
- Maximum wall or curb outage is 1/4" (Pic. 2) At max outage, the gaps will be very noticeable and will require significant amount of silicone sealant to properly seal glass.

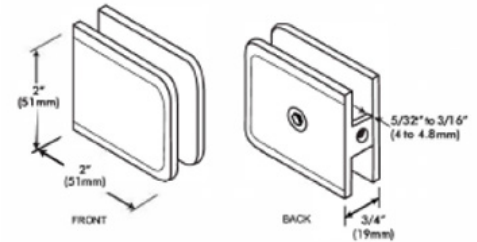

Using standard 3/4" ZSS-4104 Deep U-Channel:

- Minimum distance from edge of glass to wall or curb substrate using 1/16" blocks is 1/8" (Pic. 3)
- Maximum distance the glass can be moved off wall or curb substrate is 9/16" using two 1/4" setting blocks. (Pic. 4)

